



SMD Fluid Controls, Inc.

FH13 Stainless Steel Side Mounted Float Switches

These stainless steel switches are ideal for replacement parts or configured for OEM applications. Durable and easy to install for both Normally Open (NO) or Normally Closed (NC) operation.

FH13-0000


SS Side Mounted Switch with 1/2" NPT pipe threads

FH13-0001


SS Side Mounted Switch with PF1/8 threads for Bulkhead mounting in 1/4" through-hole



FH13-0000

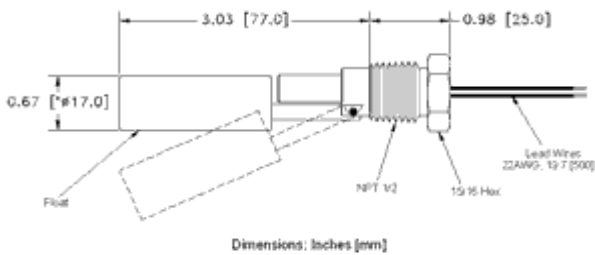

FH13-0001

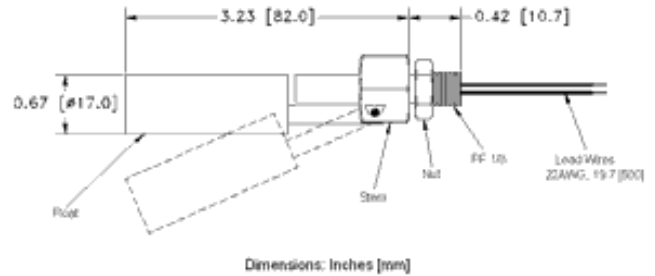

Part Number	Switch Type	Maximum Switching Current	Maximum Switching Voltage	Maximum Temperature	Maximum Pressure	Specific Gravity
FH13-0000	50 watt	.5 Amps	250 VDC	125 C	75 psig	.70
FH13-0001	50 watt	.5 Amps	250 VDC	125 C	75 psig	.70

Notes:

- All reed switches are UL rated for resistive loads, consult application notes for reed switch load considerations
- Use our application sheet to customize your switch with extended leads, connectors or other characteristics